




where inspiration flows

# SAFARI

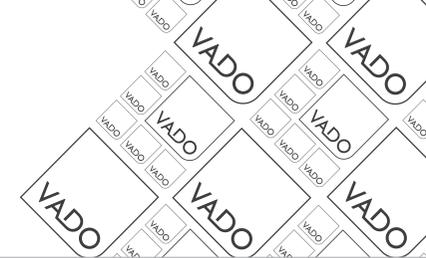


Installation Guide  
Bath filler


This instruction booklet covers these models:

SAF-137, SAF-237  
(All finish options)

SAF-137  
SAF-237

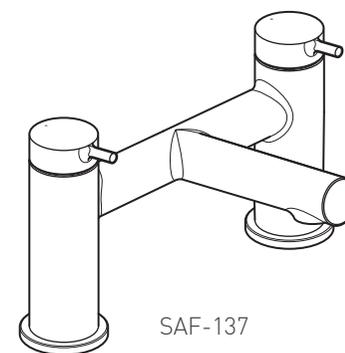

SAF-137

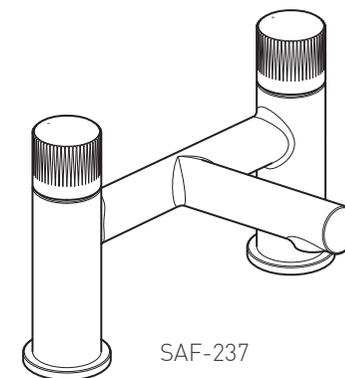

SAF-237

Vado  
Wedmore Road, Cheddar, Somerset, England BS27 3EB  
tel 01934 744466. fax 01934 744345  
aftersales@vado.com  
www.vado.com



## Important - Please Read

Please read these instructions carefully before starting installation and keep for future reference.

Remove all packaging and check the product for missing parts or damage before starting installation.

Any alterations made to this product and fittings may infringe water regulations and will invalidate the guarantee.

The installation must comply with all Local/National Water Supply Authority Regulations/Byelaws and Building and Plumbing Regulations.  
To be installed in accordance with BS EN806.

We strongly recommend that you use a qualified and registered plumber.

## General Installation

This fitting is a mixing device and therefore water supplies should be reasonably balanced.

When installed, the fitting must comply with the requirements of the Water Supply (Water Fittings) Regulations 1999 and Scottish Byelaws 2004.

For further information, contact the Water Regulations department of your local water supplier (see the WRAS website [www.wras.co.uk](http://www.wras.co.uk) for details) or the Water Regulations Advisory Scheme by email ([info@wras.co.uk](mailto:info@wras.co.uk)) or telephone: 01495848454.

Before making any inlet pipe connections, all supply pipes MUST be thoroughly flushed to remove debris. Failure to do so could result in damage or low flow from the mixer unit. Water Supply (Water Fittings) Regulations 1999 Schedule 2 Section 13.

The fitting of isolating valves to the inlet feeds is advised for ease of maintenance.

Please take great care when installing this mixer not to damage its surface.

Please note if installing in an enclosed environment, access should be left for servicing and maintenance. No costs relating to inadequate access can be accepted.

**Please note: installation for the SAF-237 is shown throughout this guide, please follow the same instructions to install the SAF-137.**

## Operating Specifications

### Operating Pressure


Minimum operating pressure **0.2 bar**

Maximum operating pressure **5 bar**

## Contents of Packaging




Installation guide &  
User manual

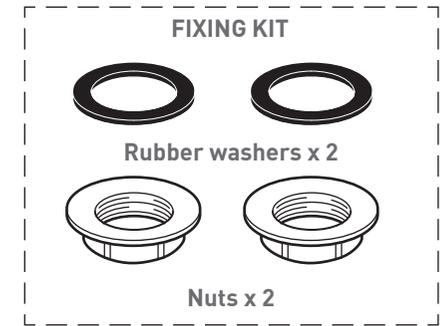

Rubber washers x 2


Nuts x 2

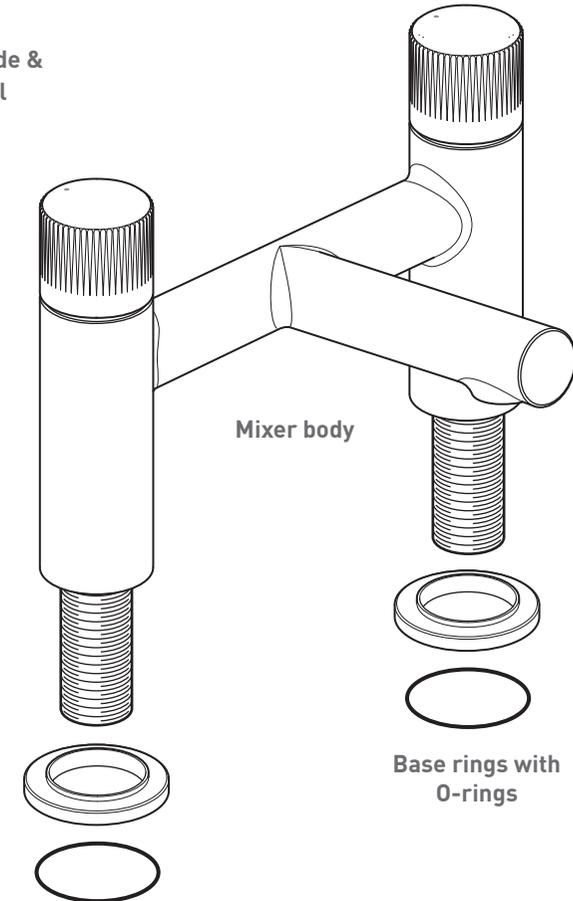


Mixer body

Base rings with  
O-rings




# Dimensions - SAF-137

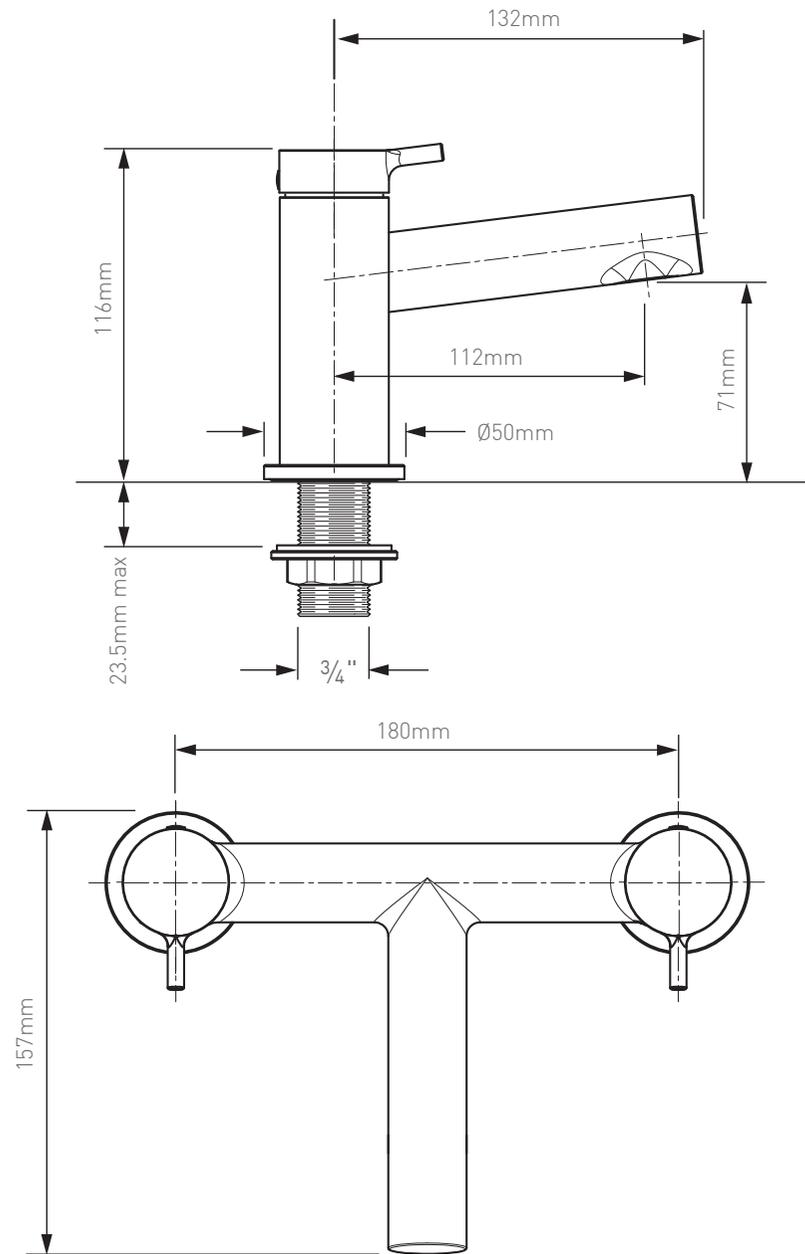


# Dimensions - SAF-237

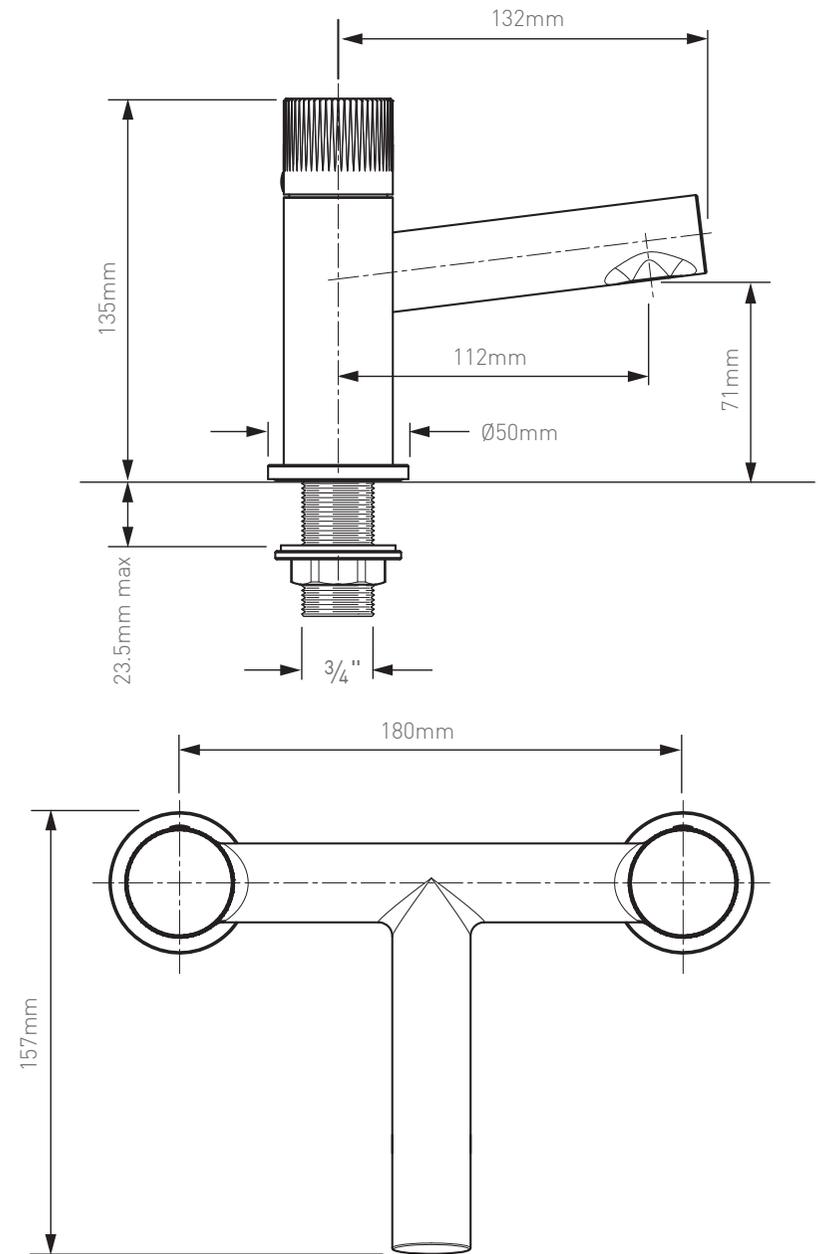

# Installation - Quick guide

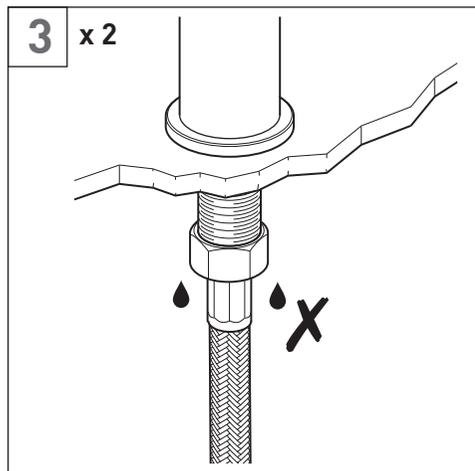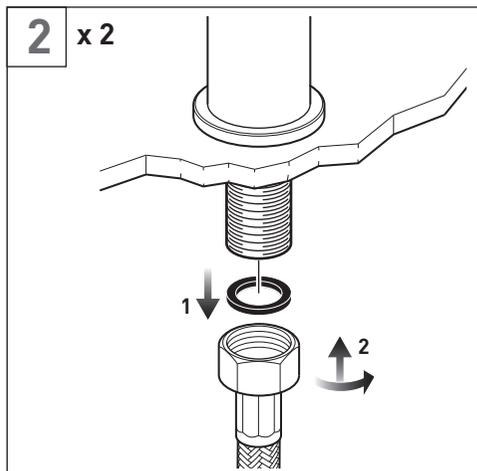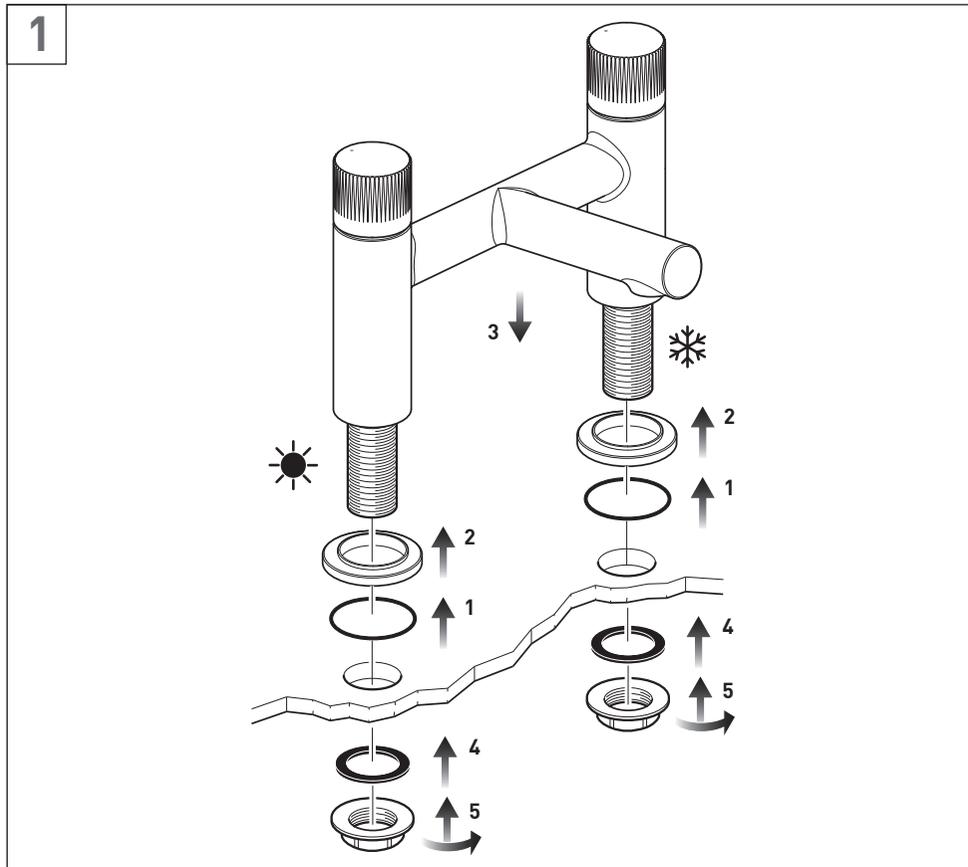

# Installation

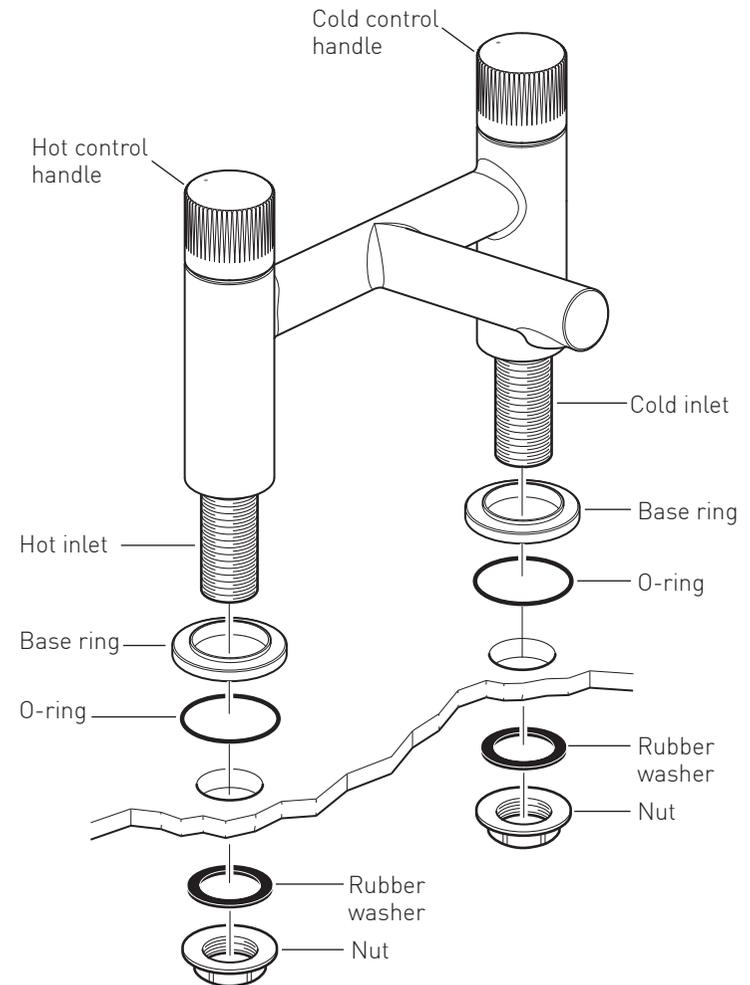

Before installing your new mixer, flush through the pipework to ensure removal of debris, turn off the water supply.

Ensure the O-rings are in the groove of the base ring. Place both base rings onto the underside of the mixer.

Position the mixer on the bath. From the underside of the bath fit the rubber washers and nuts. Tighten the nuts to clamp the mixer to the bath.

**CAUTION:** Do not over tighten the nuts as this may damage the bath.

Connect the water supply to the inlet pipes. The hot water should be connected to the left hand pipe and cold to the right.