




where inspiration flows

# SAFARI

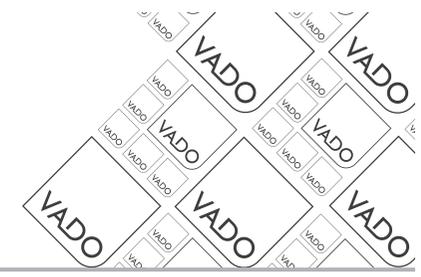


Deck mounted kitchen mixer  
Installation Guide

This instruction booklet covers models:

SAF-150  
(All finish options)

SAF-150

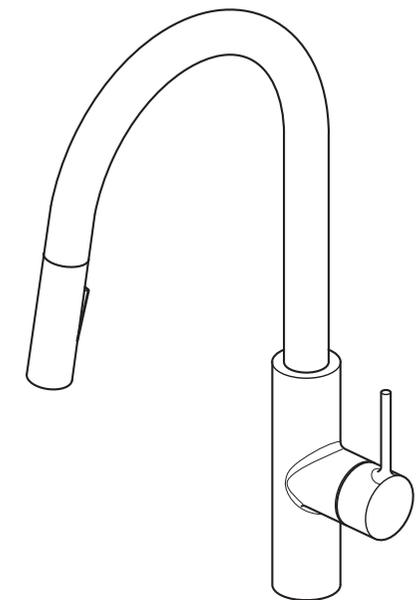

Vado  
Wedmore Road, Cheddar, Somerset, England BS27 3EB  
tel 01934 744466 fax 01934 744345  
aftersales@vado.com  
www.vado.com

Version 1, 1-3-25

Keep for future reference



## Important - please read

Please read these instructions carefully before starting installation and keep for future reference.

Remove all packaging and check the product for missing parts or damage before starting installation.

Any alterations made to this product and fittings may infringe water regulations and will invalidate the guarantee.

The installation must comply with all Local/National Water Supply Authority Regulations/Byelaws and Building and Plumbing Regulations.  
To be installed in accordance with BS EN806.

We strongly recommend that you use a qualified and registered plumber.

## General installation

This fitting is a mixing device and therefore water supplies should be reasonably balanced.

When installed, the fitting must comply with the requirements of the Water Supply (Water Fittings) Regulations 1999 and Scottish Byelaws 2004.

For further information, contact the Water Regulations department of your local water supplier (see the WRAS website [www.wras.co.uk](http://www.wras.co.uk) for details) or the Water Regulations Advisory Scheme by email ([info@wras.co.uk](mailto:info@wras.co.uk)) or telephone: 01495848454.

Before making any inlet pipe connections, all supply pipes MUST be thoroughly flushed to remove debris. Failure to do so could result in damage or low flow from the mixer unit. Water Supply (Water Fittings) Regulations 1999 Schedule 2 Section 13.

The fitting of isolating valves to the inlet feeds is advised for ease of maintenance.

Please take great care when installing this mixer not to damage its surface.

Please note if installing in an enclosed environment, access should be left for servicing and maintenance. No costs relating to inadequate access can be accepted.

## Operating Specifications

### Operating Pressure



Minimum operating pressure **1 bar**

Maximum operating pressure **5 bar**

## Contents of Packaging




Installation guide &  
User manual

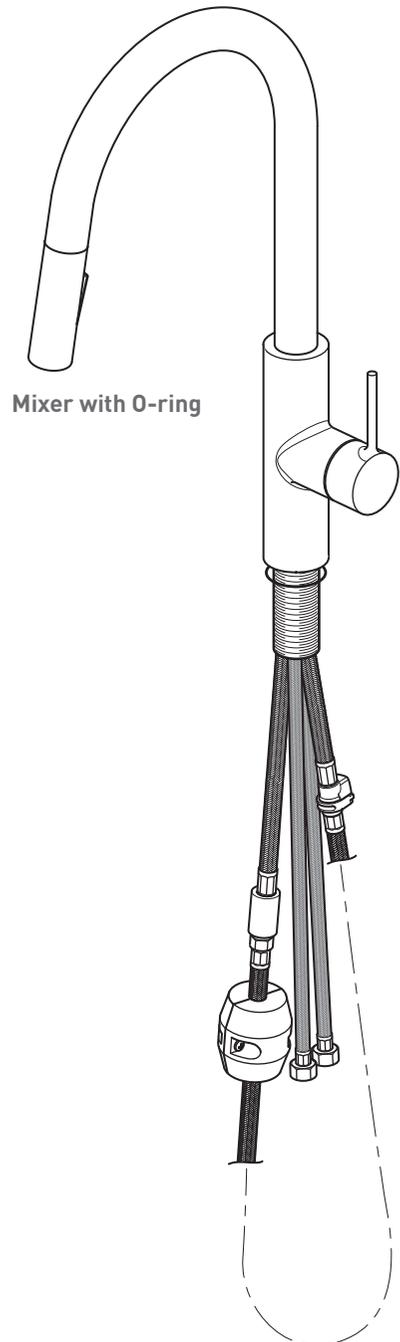
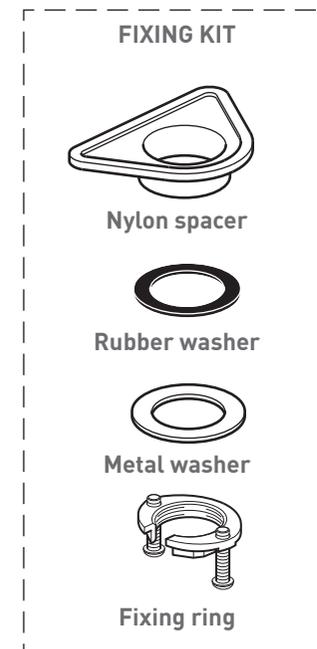


Mixer with O-ring

# Dimensions

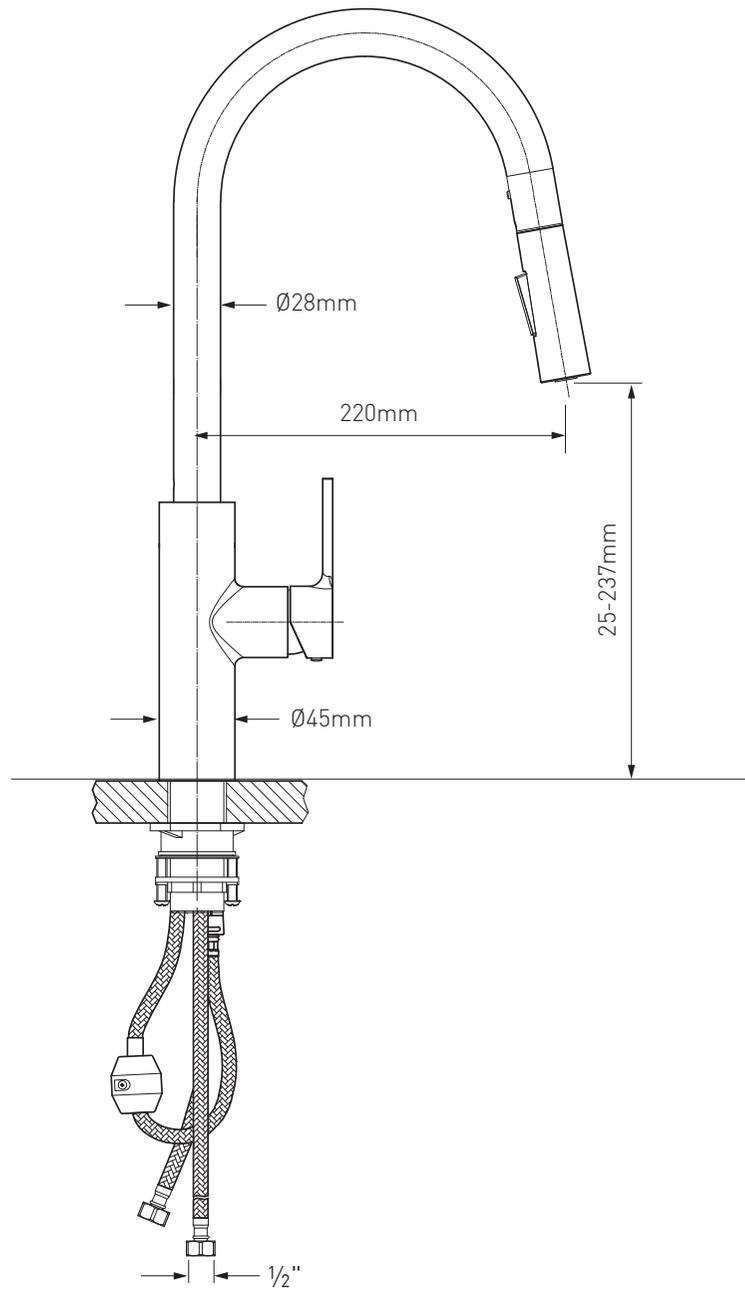

# Installation - Quick guide

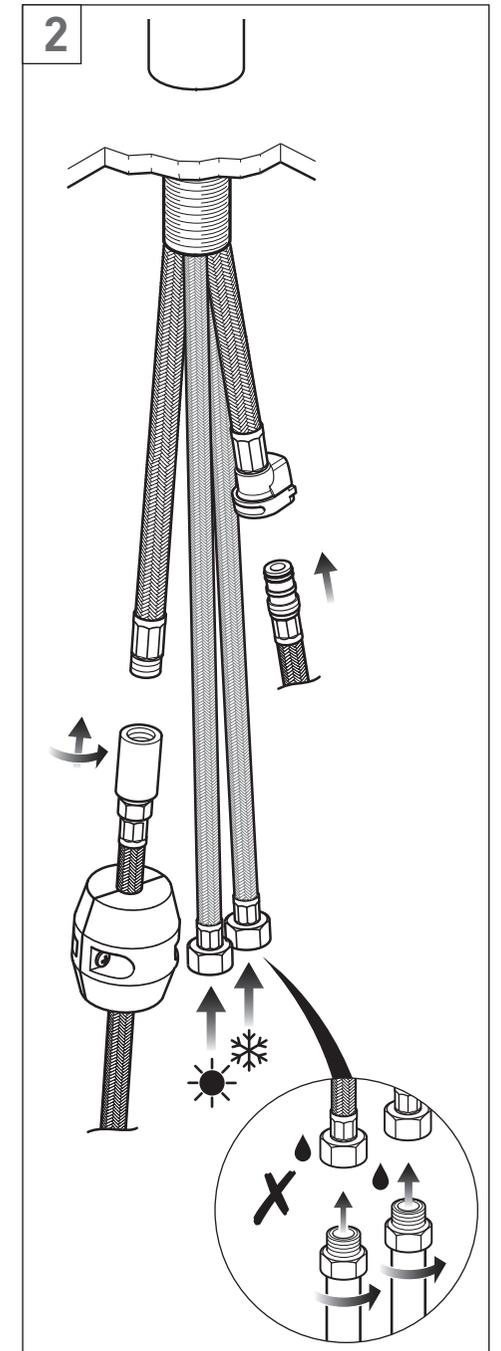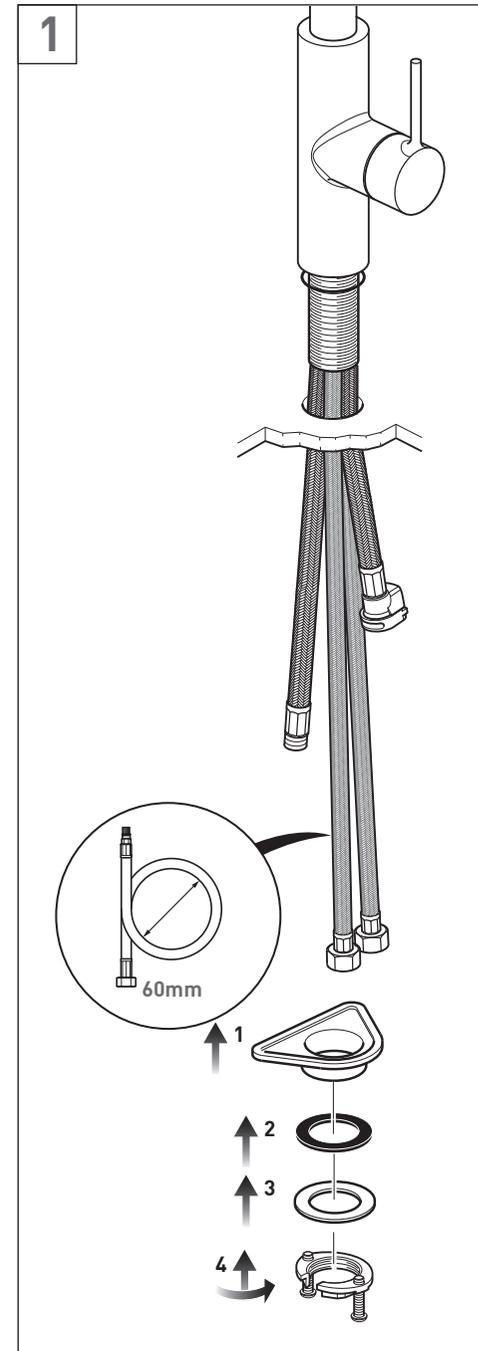

## Installation

Before installing your new mixer, flush through the pipe work to ensure removal of debris, turn off the water supply.



Check the O-ring is in position in the groove at the bottom of the mixer.

Push all the flexible hoses through the hole in the sink. Position the mixer on the sink.

From the underside, slide up the nylon spacer, rubber washer and metal washer. Make sure the two bolts in the locking ring are unscrewed but do not remove them. Screw up the locking ring until the bolts touch the metal washer. Tighten the two bolts to clamp the mixer to the sink.

**CAUTION:** Do not over tighten the screws as this may damage the sink.

**CAUTION:** When installing the flexible hoses **do not** kink, or bend them more than the 60mm diameter as shown right.

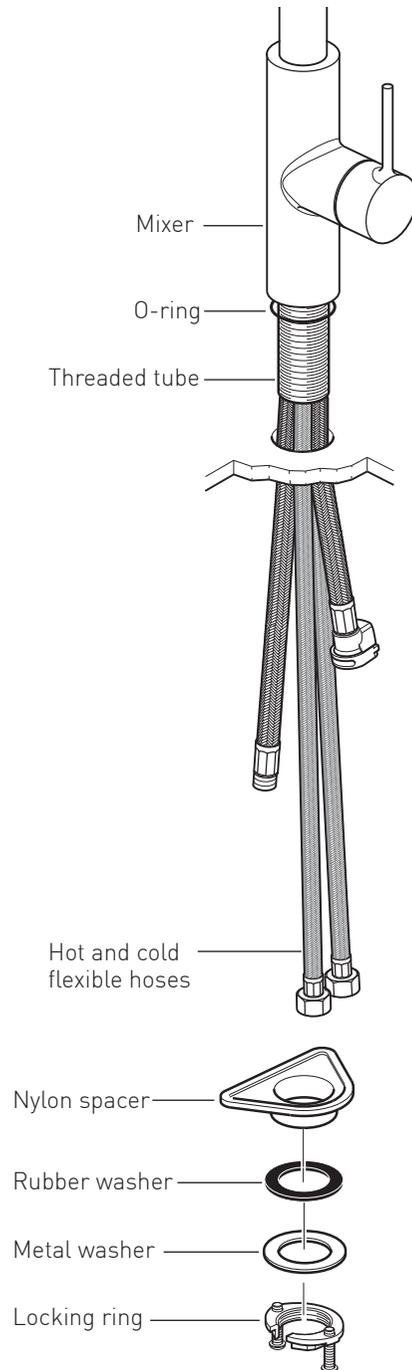

## Installation

Screw the flexible hose coming from the spout into the brass connector stop coming from the top of the weight, **hand tighten only**.

Push the other end of the flexible hose into the push fit connector.

Connect the water supply. The hot water should be connected to the left hose and cold to the right

