
SPECIFICATION SHEET

COLLECTION: CELSIUS PRODUCT CODE: CEL-123T-C/P





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

TAP TYPE

Bath Shower Mixer

PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

HOLES

2 Hole

MOUNTING

Wall Mounted

WITH INTEGRATED DIVERTER

No

WITH EASY-FIT BRACKETS

No WITH SHOWER KIT No WITH THERMOSTATIC TECHNOLOGY Yes FOR USE WITH BATH FILLER WASTE AND OVERFLOW No

tel: 01934 744466 email: sales@vado.com www.vado.com



SPECIFICATION SHEET

COLLECTION: CELSIUS PRODUCT CODE: CEL-123T-C/P

MINIMUM OPERATING PRESSURE

1.0 Bar MP

MAXIMUM OPERATING PRESSURE 5.0 Bar HP

FLOW RATE AT 3.0 BAR FLOW PRESSURE Spout: 25.6 l/min, Diverter: 22.3 l/min

RECOMMENDED FLOW REGULATOR FR-SHOWER/9-C/P

WITH BATH SPOUT

No

WITH AIR-INJECTION TECHNOLOGY

No

WITH WATER FLOW STRAIGHTENER

No

WITH WATER FLOW AERATOR

Yes

CONNECTIONS / FITTINGS

1/2" x 3/4" offset connectors

SPARE PARTS

thermostatic cartridge V-704-34S diverter cartridge C-801-33/2P

STYLE

Round

FINISH Chrome



SPECIFICATION SHEET

COLLECTION: CELSIUS PRODUCT CODE: CEL-123T-C/P

COLLECTION NAME

Celsius

GUARANTEE


15 Year Guarantee

tel: 01934 744466 email: sales@vado.com www.vado.com



TECHNICAL DRAWING

COLLECTION: CELSIUS PRODUCT CODE: CEL-123T-C/P

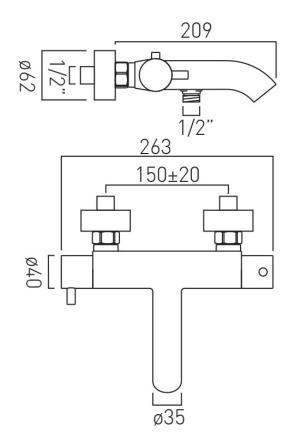

tel: 01934 744466 email: sales@vado.com www.vado.com

