
SPECIFICATION SHEET

COLLECTION: GEO PRODUCT CODE: GEO-135-3/4-C/P

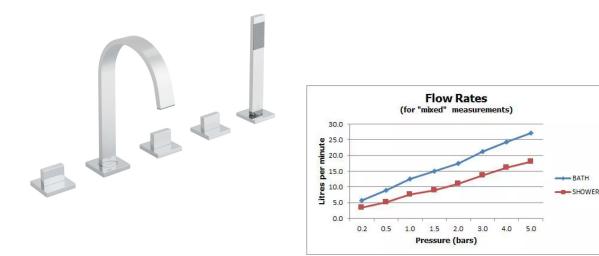

The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

TAP TYPE

Bath Shower Mixer

PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

HOLES

5 Hole

MOUNTING

Deck Mounted

WITH INTEGRATED DIVERTER

No

WITH EASY-FIT BRACKETS

No

WITH SHOWER KIT

Yes

WITH SWIVEL SPOUT Spout Can Swivel or Be Fixed

WITH THERMOSTATIC TECHNOLOGY

tel: 01934 744466 email: sales@vado.com www.vado.com



SPECIFICATION SHEET

COLLECTION: GEO PRODUCT CODE: GEO-135-3/4-C/P

FOR USE WITH BATH FILLER WASTE AND OVERFLOW

No

MINIMUM OPERATING PRESSURE

1.5 Bar MP

RECOMMENDED FLOW REGULATOR FR-FLEXI/8-PLA

WITH BATH SPOUT

Yes

WITH AIR-INJECTION TECHNOLOGY

No

WITH WATER FLOW STRAIGHTENER

Yes

WITH WATER FLOW AERATOR

No

INSTALLATION TOLERANCES min-max bath thickness 6mm - 38mm

CONNECTIONS / FITTINGS 1 x 1/2" x 3/8" 200cm showerhose FxF 3 x 3/4" x 3/4" 600mm flexipipe connections

DECK HOLE DRILL DIAMETER Spout: 28-30mm Valve: 37mm Diverter: 46mm Handset: 30mm

SPARE PARTS cold ceramic cartridge C-302-RTC hot ceramic cartridge C-302-LTC

NOTES 3/4" ceramic disc 1/4 turn valves



SPECIFICATION SHEET

COLLECTION: GEO PRODUCT CODE: GEO-135-3/4-C/P

FINISH Chrome

COLLECTION NAME

Geo


GUARANTEE 15 Year Guarantee

tel: 01934 744466 email: sales@vado.com www.vado.com



TECHNICAL DRAWING

COLLECTION: GEO PRODUCT CODE: GEO-135-3/4-C/P



tel: 01934 744466 email: sales@vado.com www.vado.com

