


SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

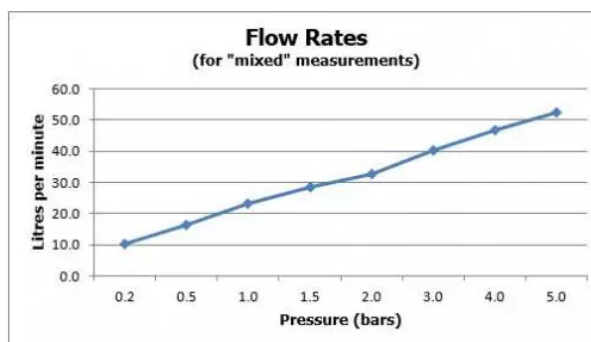

The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

TAP TYPE

Bath Shower Mixer

PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

HOLES

4 Hole

MOUNTING

Deck Mounted

WITH INTEGRATED DIVERTER

No

WITH EASY-FIT BRACKETS

No

WITH SHOWER KIT

Yes

WITH THERMOSTATIC TECHNOLOGY

No

FOR USE WITH BATH FILLER WASTE AND OVERFLOW

Yes

tel: 01934 744466
email: sales@vado.com
www.vado.com

WHERE INSPIRATION FLOWS
TAPS | SHOWERS | FURNITURE



SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

MINIMUM OPERATING PRESSURE

1.0 Bar MP

MAXIMUM OPERATING PRESSURE

5.0 Bar HP

RECOMMENDED FLOW REGULATOR

FR-FLEXI/8-PLA

WITH BATH SPOUT

No

WITH AIR-INJECTION TECHNOLOGY

No

WITH WATER FLOW STRAIGHTENER

No

WITH WATER FLOW AERATOR

No

INSTALLATION TOLERANCES

min-max bath thickness 1mm - 40mm

CONNECTIONS / FITTINGS

1 x 1/2" x 3/8" 200cm shower hose 2 x 3/4" x 3/4" 600mm flexipipe connections

DECK HOLE DRILL DIAMETER

35mm

SPARE PARTS

1/4 turn ceramic disc valves FL-301-RTC FL-301-LTC ceramic diverter cartridge FL-803-33/2X

FINISH

Chrome

SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

COLLECTION NAME

Omika

GUARANTEE

15 Year Guarantee

tel: 01934 744466
email: sales@vado.com
www.vado.com

WHERE INSPIRATION FLOWS
TAPS | SHOWERS | FURNITURE



TECHNICAL DRAWING

COLLECTION: OMIKA

PRODUCT CODE: OMI-135/NS-C/P

