
# SPECIFICATION SHEET

COLLECTION: AXBRIDGE

PRODUCT CODE: BC-AXB-148-BN





The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

#### SHOWER TYPE

Shower Valve

#### STYLE

Traditional

#### NUMBER OF OUTLETS

1 Outlet

#### WITH ALL-FLOW FUNCTION

No

#### WITH INTEGRATED DIVERTER

No

#### COMPATIBLE WITH STUDFAST

Νo

### WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION

No

#### WITH SHOWER KIT

No

#### INCLUDES MORTAR / TILE GUARD

No

tel: 01934 744466 email: sales@vado.com

www.vado.com

WHERE INSPIRATION FLOWS



# SPECIFICATION SHEET

COLLECTION: AXBRIDGE

PRODUCT CODE: BC-AXB-148-BN

#### COMPATIBLE WITH EASY-FIX BRACKETS

No

#### WITH THERMOSTATIC TECHNOLOGY

No

#### **CONNECTIONS / FITTINGS**

2 x 3/4" female inlets 2 x 3/4" female outlets

#### MOUNTING

Wall Mounted

#### PLUMBING SYSTEM SUITABILITY

Gravity System, Pumped System, Combination Boiler, Pressurised System

#### **COLLECTION NAME**

Axbridge

#### **FINISH**

Bright Nickel

#### MINIMUM OPERATING PRESSURE

0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

#### MAXIMUM OPERATING PRESSURE

5.0 Bar HP

#### **GUARANTEE**

15 Year Guarantee

tel: 01934 744466 email: sales@vado.com www.vado.com






### TECHNICAL DRAWING

COLLECTION: AXBRIDGE

PRODUCT CODE: BC-AXB-148-BN

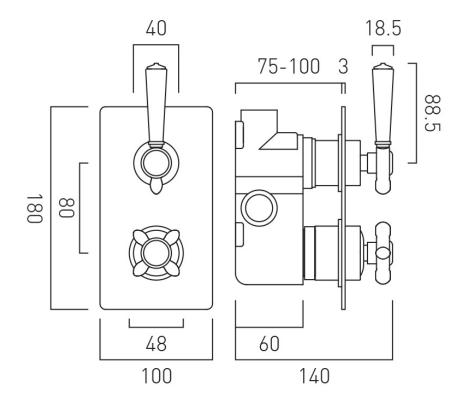

tel: 01934 744466 email: sales@vado.com

www.vado.com



