
SPECIFICATION SHEET

COLLECTION: DX ELEMENTS
PRODUCT CODE: ELE-148D/2-C/P



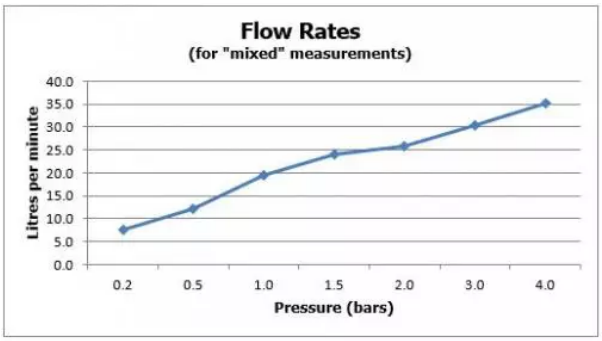

The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

SHOWER TYPE
Shower Valve

VALVE TYPE
Concealed

ORIENTATION
Vertical

NUMBER OF OUTLETS
2 Outlet

WITH ALL-FLOW FUNCTION
No

WITH INTEGRATED DIVERTER
No

COMPATIBLE WITH STUDFAST
Yes

WITH BLEED VALVE FOR SYSTEM FLUSH ON INSTALLATION
Yes

WITH SHOWER KIT
No

tel: 01934 744466
email: sales@vado.com
www.vado.com

WHERE INSPIRATION FLOWS
TAPS | SHOWERS | FURNITURE

VADO

SPECIFICATION SHEET

COLLECTION: DX ELEMENTS
PRODUCT CODE: ELE-148D/2-C/P

INCLUDES MORTAR / TILE GUARD
Yes

COMPATIBLE WITH EASY-FIX BRACKETS
No

WITH THERMOSTATIC TECHNOLOGY
Yes

INSTALLATION TOLERANCES
min-max wall mount 70-95mm optimum installation depth 82mm

CONNECTIONS / FITTINGS
2 x 3/4" female inlets 2 x 3/4" female outlets

SPARE PARTS
thermostatic cartridge V-704-34S diverter cartridge C-803-33X/3X.

MOUNTING
Wall Mounted

PLUMBING SYSTEM SUITABILITY
Gravity System, Pumped System, Combination Boiler, Pressurised System

COLLECTION NAME
DX Elements

FINISH
Chrome

MINIMUM OPERATING PRESSURE
0.2 Bar LP (Shower) / 1.0 Bar MP (Bath)

MAXIMUM OPERATING PRESSURE
5.0 Bar HP

tel: 01934 744466
email: sales@vado.com
www.vado.com

SPECIFICATION SHEET

COLLECTION: DX ELEMENTS
PRODUCT CODE: ELE-148D/2-C/P

GUARANTEE

15 Year Guarantee

tel: 01934 744466
email: sales@vado.com
www.vado.com

WHERE INSPIRATION FLOWS

TAPS | SHOWERS | FURNITURE

VADO