


SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-100E/SB-C/P

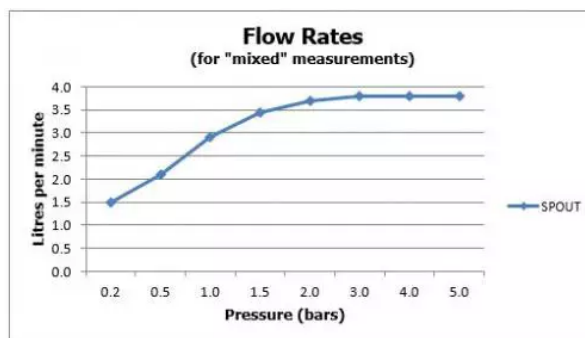

The flow rate displayed is calculated using ideal system conditions. This result should only be taken as an indication as the flow rate may vary depending on the specific in-situ configuration.

TAP TYPE

Tall Extended Taps

FINISH

Chrome

COLLECTION NAME

Omika

GUARANTEE

15 Year Guarantee

PLUMBING SYSTEM SUITABILITY

Pumped System, Combination Boiler, Pressurised System

MINIMUM OPERATING PRESSURE

1.0 Bar MP

MAXIMUM OPERATING PRESSURE

5.0 Bar HP

MOUNTING

Deck Mounted

RECOMMENDED FLOW REGULATOR

4 l/m flow regulator fitted as standard

tel: 01934 744466
email: sales@vado.com
www.vado.com

WHERE INSPIRATION FLOWS
TAPS | SHOWERS | FURNITURE



SPECIFICATION SHEET

COLLECTION: OMIKA

PRODUCT CODE: OMI-100E/SB-C/P

WITH ECOTURN COLD START TECHNOLOGY

No

WITH WATER FLOW STRAIGHTENER

No

WITH WATER FLOW AERATOR

Yes

CONNECTIONS / FITTINGS

2 x 1/2" 400mm flexipipe connections

DECK HOLE DRILL DIAMETER

35mm

SPARE PARTS

2 x FL-401-RTC

NOTES

1/4 turn ceramic disc valves

TECHNICAL DRAWING

COLLECTION: OMIKA

PRODUCT CODE: OMI-100E/SB-C/P

